

6,4"

Touch  
screen

**Features**

- With resistive or capacitive touch screen
- RoHS Compliant

**LCD Display**

LCD Type	Grade A industrial TFT LCD Panel
Display Size	6.4 inch diagonal (129.6H x 97.44V)
Resolution	640 x 480, VGA
Display Color	262,144 color
Brightness	300 cd/m <sup>2</sup>
Contrast Ratio	180 : 1 (Typical)
Pixel Pitch	0.203 x 0.203 mm
Viewing Angle	55 / 55 / 15 / 35 (L / R / U / D)
OSD Control	Brightness, Contrast, Phase & Clock, Color, H & V position, Auto-tune & Recall
VGA Connector	D-Sub 15 pin VGA analog
Video Input	S-Video and Composite
LCD LLT. 20,000 hrs	
Mounting	Panel, wall-mount or VESA arm
Dimension	230(W) x 167(H) x 44(D) mm
Weight	1 kg (Net) / 3 kg (Gross)
Packing	480(L) x 362(W) x 85(H) mm

**Touch Screen**

Type	Resistive	Capacitive
Thickness	1.8mm	1.8mm
Light transmission	75%	85%
Controller Interface	Serial / USB	Serial / USB
Durability	35 Million	225 Million
OS Support	Windows XP, 2000, NT, 98, DOS and Linux	



Premier Computer  
Handels GmbH  
Woehlerstrasse 6  
22113 Hamburg (Germany)  
tel: +49 (0)40 736161-0  
fax: +49 (0)40 736161-33  
e-mail : office@premiercomputer.de  
homepage: www.premiercomputer.de



**External Power Adapter**

AC Input	110V ~ 220V AC Input
DC Input	12V@3A Output
AC Cable	Length 180cm
DC Cable Length	182cm
Adapter Size	108(L) x 64(W) x 30(H) mm
Safety Approval	UL, CE


**Environmental**

Operating Temperature	-20 to 70oC
Storage Temperature	-30 to 70oC
Humidity	80%, non condensing
Shock	10G peak acceleration ( 11mec. duration )
Safety Approval	CE, FCC

**Ordering Information**

Article-Number: 5000693

**Dimension Diagram**

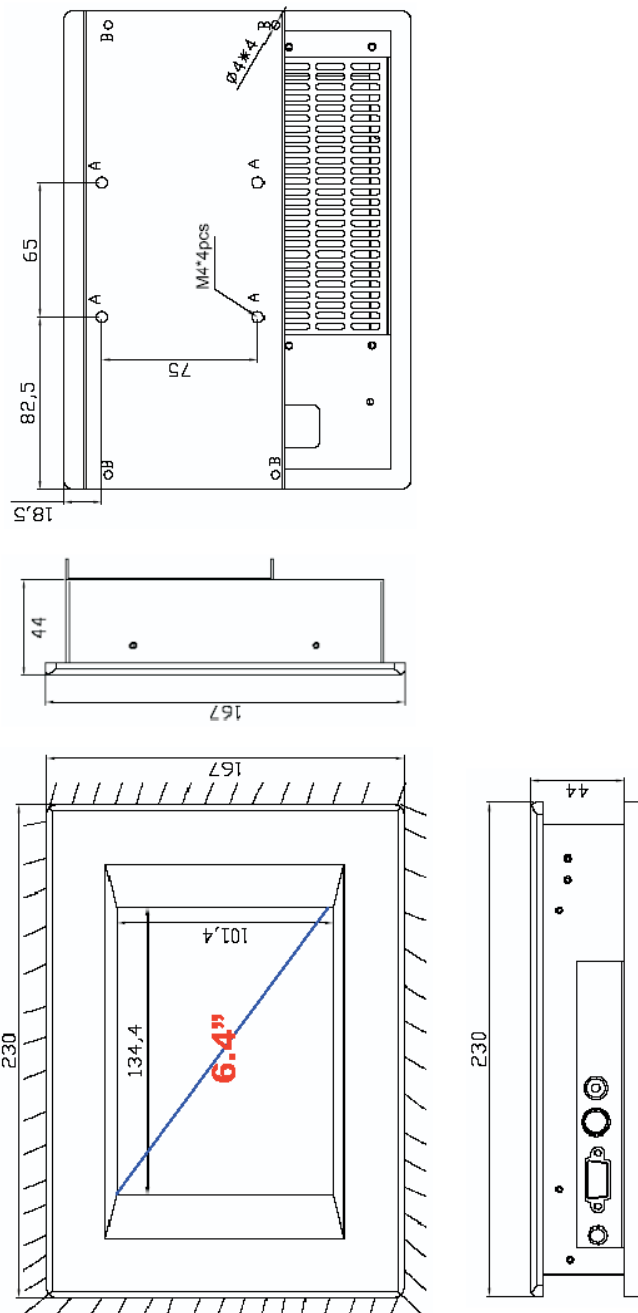

Premier Computer  
Handels GmbH  
Woehlerstrasse 6  
22113 Hamburg (Germany)  
tel: +49 (0)40 736161-0  
fax: +49 (0)40 736161-33  
e-mail : office@premiercomputer.de  
homepage: www.premiercomputer.de

